

# **Tools Required:**

- Phillips Screwdriver
- 9/16" Drive Socket Wrench

## **Installation Warnings - Read Before Lifting Oven**

⚠ **WARNING:** Never lift the oven by the door handle. Doing so will cause the door to mis-align, resulting in a non-warranty service call.

⚠ **WARNING:** The ovens must be properly secured to an oven cart or food station at all times. TurboChef will not recognize a fallen oven as a warrantable claim and is not liable for any injuries that may result.

⚠ **WARNING:** Never stack ovens more than two high.

# Installing the Oven onto the Oven Cart:

### STEP 1:

Ensure the oven cart casters are locked.

### STEP 2:

Ensure the oven legs are removed.

⚠ WARNING: Never lift the oven by the door handle. Doing so will cause the door to misalign, resulting in a non-warranty service call.

#### STEP 3:


Place the oven on the oven cart using the procedure outlined in the Owner's Manual.

#### STEP 4:

Ensure the holes in the cart align with the leg holes of the oven.

#### NOTE:

Make sure to align the HHD legs with the correct holes in the cart. The proper holes are shown filled in the figure below.

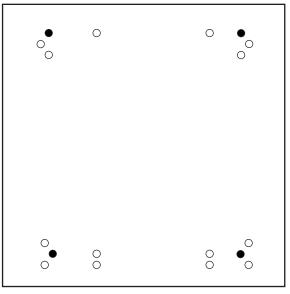


CART FRONT



## STEP 5:

Use the bolts and fasteners provided with the cart to secure the oven, as shown in Figure 1.

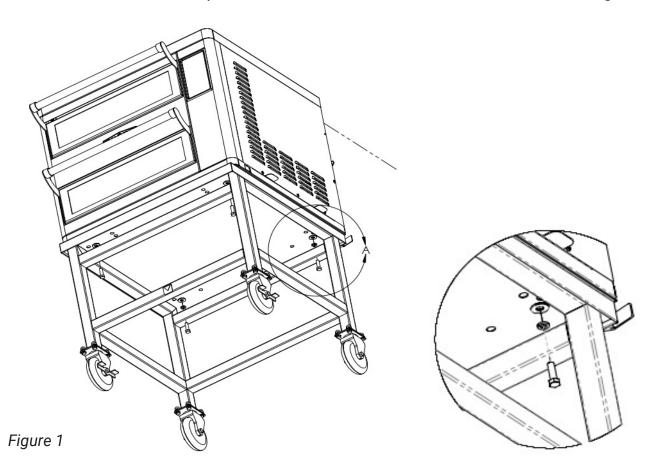

# Stacking the Ovens:

### STEP 1:

Position one or more persons at the front and back of the top oven.

#### STEP 2:


Place hands under the top oven and lift.

### **STEP 3:**

Stack the top oven on the bottom oven.




**STEP 4:** Remove the eight screws and plastic bumpers marked in Figure 2.

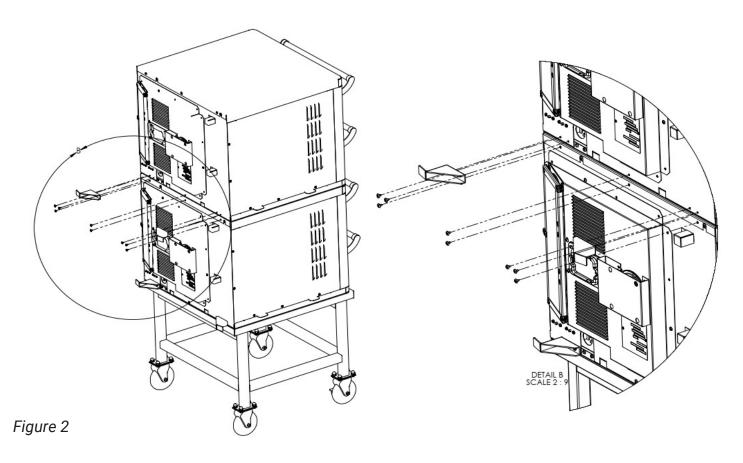



**STEP 5:** Align the bracket shown in Figure 3.

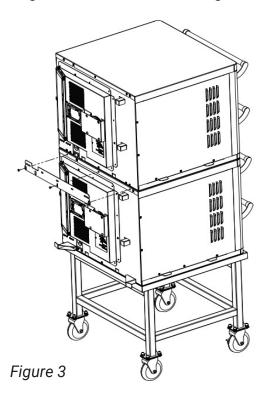



## STEP 6:

Reinstall the screws to attach the bracket to the bottom oven.

### **STEP 7:**

Align the bracket with the holes in the top oven and reinstall the screws and bumpers as shown in Figure 4.

